




MK 30-05/MK 30-15 Automotive Fluid Resistance

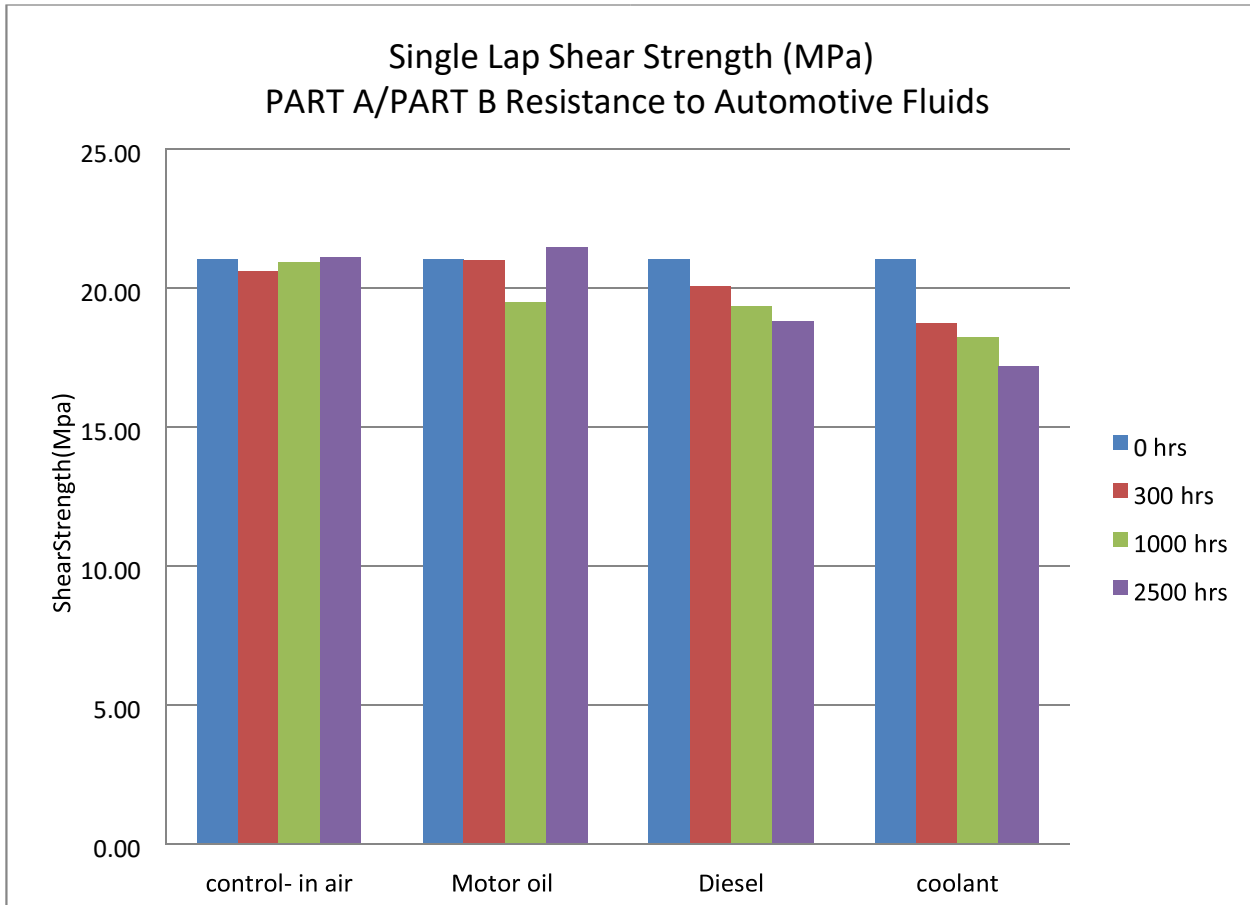

Single Lap Shear Strength in MPa (Tests conducted at 24 C, 50% RH (ASTM D1002))

| Hours soaking | control (in air) | Motor oil | Diesel | coolant |
|---------------|------------------|-----------|--------|---------|
| 0 hrs | 21.03 | 21.03 | 21.03 | 21.03 |
| 300 hrs | 20.60 | 21.02 | 20.04 | 18.75 |
| 1000 hrs | 20.94 | 19.50 | 19.34 | 18.22 |
| 2500 hrs | 21.10 | 21.45 | 18.80 | 17.20 |

www.mastikol.com



Mastikol SRL
Via Circonvallazione 186/8
10026 – Santena (TO)
+39 0119493746
mastikol@mastikol.it